


CP- UNC-DC21L5C-MDS**2MP Full HD WDR IR Dome Camera - 50Mtr.****Main Features**

- 1/2.8" 2Megapixel PS CMOS Image Sensor (0.9071cm)
- Max. 2MP(1920 × 1080)@30fps
- Instastream, H.265 and H.264+ triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm Lens (2.8mm, 6mm Optional)
- IR Range of 50 Mtrs, IP67, Micro SD Card, PoE
- Built-in Mic
- Support Starlight Technology
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

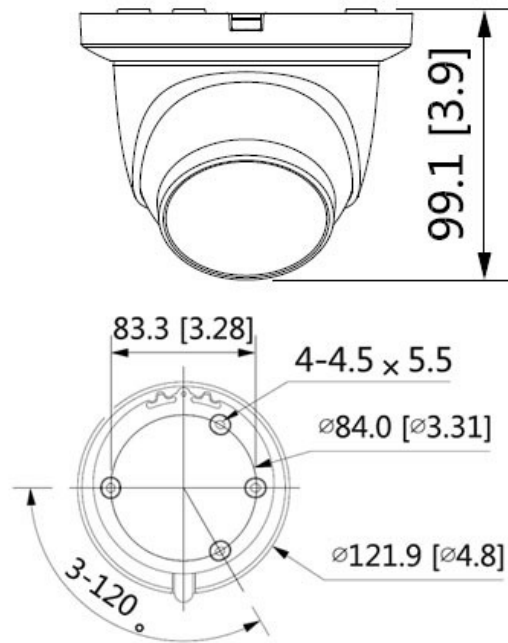

CP- UNC-DC21L5C-MDS

2MP Full HD WDR IR Dome Camera - 50Mtr.

Feature

Image Sensor
 Minimum Illumination
 Effective Pixels
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 Angle of View
 Back Light Compensation
 Video Streaming
 Resolution
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Compression
 Audio
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 Event Trigger
 User/Host
 Smart Phone
 IR
 Micro SD

Specification

1/2.8" 2Megapixel progressive CMOS (0.9071cm)
 0.002 Lux@F1.6
 1920 (H) ×1080 (V)
 Auto/Manual 1/3 s–1/100000 s
 Auto/natural/street lamp/outdoor/manual/regional custom
 3.6mm (2.8mm, 6mm optional)
 Auto/Manual
 Instastream/H.265/H.264+/H.264/H.264H; H.264B; MJPEG
 2.8mm: H: 106°; V: 57°; D: 126°, 3.6mm: H: 87°; V: 46°; D: 104°, 6mm: H: 54°; V: 29°; D: 63°
 BLC / HLC / WDR(120dB)
 Main stream (1920 × 1080@1–25/30 fps) sub stream(704 × 576@1–25/30 fps) third stream (1280 × 720@1–25/30 fps)
 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
 OFF/ON (4 areas, rectangular)
 4 areas
 ICR auto switch
 Yes (4 areas)
 G.711a; G.711Mu; G726; AAC
 Built-in Mic
 H.264: 3 Kbps–8192 Kbps H.265: 3 Kbps–8192 Kbps
 HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; SNMP; QoS; UPnP; NTP; ONVIF (Profile S/Profile G); CGI; InstaOn cloud
 Tripwire, intrusion (Recognition of human and vehicle)
 RJ-45 (10/100Base-T)
 Motion detection, video tampering, scene changing, audio abnormality detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
 20 Users
 iPhone, iPad, Android Phone
 IR Range of 50 Mtr.
 FTP, Micro SD card 512GB, NAS

CP- UNC-DC21L5C-MDS

2MP Full HD WDR IR Dome Camera - 50Mtr.

Feature

Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Casing
Dimension
Weight

Specification

-40° C ~ +60° C (-40° F ~ +140° F) / Less than 95% RH
12V DC/PoE
<7.7W
IP67
Metal + Plastic
101 mm × Φ110 mm (4.0" × Φ4.3")
420g