


CP- UNC-TB41L3-MDS**4MP Full HD WDR IR Bullet Camera - 30Mtr.****Main Features**

- 1/3" 4MP CMOS image sensor (0.84667cm)
- 4MP (2560 × 1440)@25/30 fps
- Support Starlight Technology
- Instastream and H.264+ Dual Stream Coding
- WDR(120dB), 3D-DNR, ROI, HLC, BLC, Digital watermarking, Rotation mode
- 3.6mm fixed lens (2.8mm optional)
- Built-in IR LED, IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

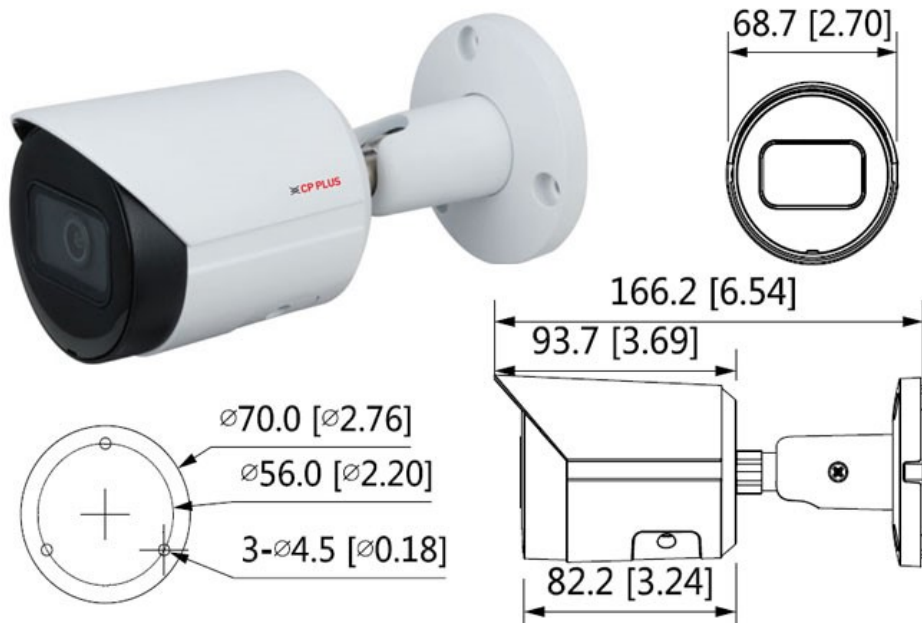

CP- UNC-TB41L3-MDS

4MP Full HD WDR IR Bullet Camera - 30Mtr.

Feature

Image Sensor

Effective Pixels

Minimum Illumination

S/N Ratio

Lens

Angle of View

White Balance

Gain Control (AGC)

Back Light Compensation

Video Compression

Resolution

Frame Rate

Motion detection

Privacy Mask

Mirror

ICR

ROI

Bit Rate

IVS

Event Trigger

Protocol

Ethernet

User Account

Specification

1/3" 4MP PS CMOS Image Sensor (0.84667cm)

2688 (H) × 1520 (V)

0.008 Lux@F1.6

>56dB

3.6mm fixed lens (2.8mm optional)

3.6mm: H: 84.0°, V: 45.0°, D: 100.0°

2.8mm: H: 102.0°, V: 55.0°, D: 121.0°

Auto/natural/street lamp/outdoor/manual/regional custom

Auto/Manual

BLC/ HLC/ WDR(120dB)

Instastream; H.265; H.264+; H.264; H.264B; MJPEG (only supported by sub stream)

4MP (2688 × 1520) 4MP(2560 × 1440) ; 3MP(2304 × 1296); 2MP (1920 × 1080);

1.3MP(1280 × 960); 720P (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480);

CIF (352 × 288/352 × 240)

Main stream: 2688 × 1520 (1 fps-20 fps) 2560 × 1440 (1 fps-25/30 fps)

Sub stream: 704 × 576 (1 fps-25 fps) 704 × 480 (1 fps-30 fps)

OFF/ON (4 areas, rectangular)

4 Areas

Yes

Auto (ICR)/Color/B/W

Yes (4 areas)

H.264: 32 kbps–6144 kbps , H.265: 12 kbps–6144 kbps

Intrusion; tripwire

Abnormality detection: Motion detection, video tempering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection

HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; RTMP; Multicast; HTTPS; SFTP; 802.1x; ICMP; IGMP; ONVIF (Profile S/Profile G/Profile T); CGI; Milestone; Genetec

RJ-45 (10/100Base-T)

20 Users

CP- UNC-TB41L3-MDS

4MP Full HD WDR IR Bullet Camera - 30Mtr.

Feature

IR

Smart Phone

Micro SD

Operating Temperature

Operating Humidity

Storage Temperature

Storage Humidity

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

Specification

IR Range of 30 Mtr.

iPhone, iPad, Android Phone

FTP; SFTP; Micro SD card (max. 512GB); NAS

-40°C to +60°C (-40°F to +140°F)

≤95%

-40°C to +60°C (-40°F to +140°F)

≤95%

12V DC/PoE(802.3af)

<5W

IP67

Metal

166.2 mm × Φ70 mm (6.54" × Φ2.76")

0.48 kg